

BULK SOLIDS HANDLING EQUIPMENT

PNEUMATIC VIBRATORS

气动振动器

OT 涡轮型振动器 Rotary Turbine Vibrators OT-series

OT 系列振动器由转子在内部不平衡力矩的离心力产生振动。转子由二个高功率，预润滑的匹配有护圈轴承支持。

With OT-series Rotary Turbine Vibrators vibration is generated by a turbine fitted with eccentric weights.




OT




Rotary Turbine Vibrators

气动涡轮振动器

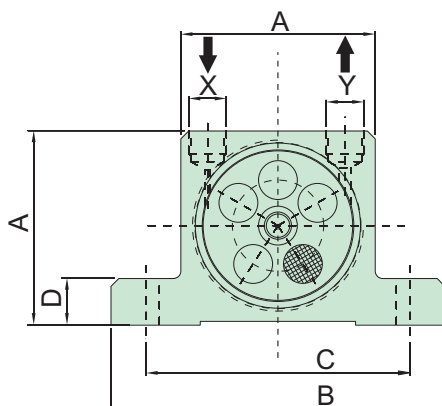

OT
Turbine-type

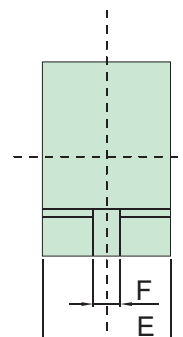

- Lubrication-free
- Maintenance-free
- Explosion-proof
- Low noise level
- 0 ~ +200°C

连接尺寸 CONNECTION SIZE

TYPE	Vibrations 振次			F.C. max. 激振力			Air consumption 耗气量						X-Y				
	Vpm			kg			l			A	B	C			D	E	F
	2 bar	4 bar	6 bar	2 bar	4 bar	6 bar	2 bar	4 bar	6 bar	mm	mm	mm	mm	mm	mm	mm	kg
OT 8	34,000	38,000	42,000	110	205	292	45	81	110								0.26
OT 10	26,000	33,000	38,000	105	171	252	45	81	110	50	86	68	12	33	7	1/8	0.27
OT 13	24,500	28,500	31,000	202	263	300	122	204	285								0.57
OT 16	18,000	20,000	21,000	194	239	264	122	204	285	65	113	90	16	42	9	1/4	0.58
OT 20	14,500	19,000	23,000	251	404	526	184	318	452								1.10
OT 25	13,200	15,500	17,000	244	336	508	184	318	452	80	128	104	16	56	9	1/4	1.12
OT 30	11,000	12,500	14,500	351	721	781	322	542	749								2.20
OT 36	8,500	11,500	12,000	341	698	749	322	542	749	100	160	130	20	73	11	3/8	2.30

Dimensions in mm